

RONK SOLID PERFORMANCE

**"New" Unfused
Disconnect Switches
from Ronk.**



- Meets NEC 430.102 for motor disconnect switch
- Light weight Type 3R aluminum construction
- Standard installed neutral bar
- Industry unique design load break contact mechanism that will not fail due to fouling
- 100-400 Amp ratings
- 240 VOLT – Single and three phase
- 60+ Years of proven reliability and design

RONK

ELECTRICAL INDUSTRIES, INC.

Part of the Growing METER-RITE® Switch Line

Ph: 1-800-221-7665 web: ronkelectrical.com

MODELS AVAILABLE FROM STOCK

D7103	100 Amp - 2 Pole - 240 volt - Single Phase
D7205A	200 Amp - 2 Pole - 240 volt - Single Phase
D7406	400 Amp - 2 Pole - 240 volt - Single Phase
D7805	200 Amp - 3 Pole - 240 volt - Three Phase
D7806	400 Amp - 3 Pole - 240 volt - Three Phase

MANUAL, NOT FUSIBLE - QUICK-BREAK/QUICK-MAKE
METER-RITE® Switches listed below are rated 100% capacity, continuous duty.

CATALOG NUMBER	APPROX WEIGHT (LBS)	
D7103 D7205A D7406	13 35 48	SINGLE PHASE (240 VAC) UL LISTED Double Pole - Single Throw, 100 amp Double Pole - Single Throw, 200 amp Double Pole - Single Throw, 400 amp
D7805 D7806	56 56	THREE PHASE (240 VAC) UL LISTED Triple Pole - Single Throw, 200 amp Triple Pole - Single Throw, 400 amp

CATALOG NUMBER	CONDUIT KNOCKOUT SIZES
D7103 D7205A D7406	(3) 1 to 1-1/4, (1) 1/2 (3) 1-1/2 to 2, (1) 1/2 (2) 2-1/2 to 3, (1) 1-1/2 to 2, (1) 1/2
D7805 D7806	(4) 2 to 2-1/2, (1) 1/2 (3) 3 to 3-1/2, (1) 2 to 2-1/2, (1) 1/2

All knockouts are on bottom of switches.

DIMENSIONS OF NEMA 3R ENCLOSURES

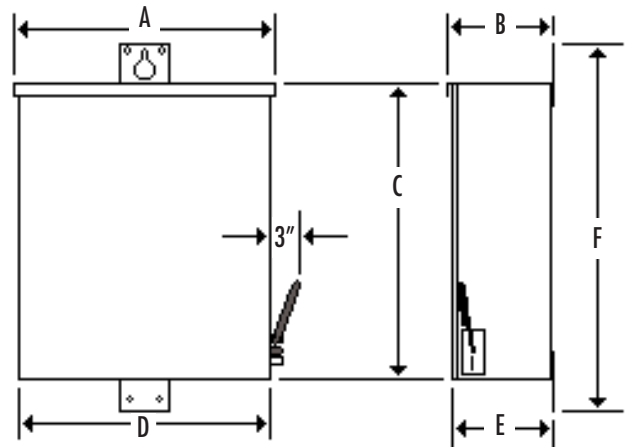


FIGURE 1

CATALOG NUMBER	WIRE RANGE	FIGURE#	A	B	C	D	E	F
D7103	J	1	12	6-1/2	12-7/8	11-3/8	6-1/4	17-5/8
D7205A	A	1	16-3/4	8-9/16	24-1/4	15-1/2	8-5/16	29
D7406	C	1	19-3/4	8-9/16	26-1/4	18-1/2	8-5/16	31
D7805	B	1	25-3/4	8-9/16	26-1/4	24-1/2	8-5/16	31
D7806	D	1	25-3/4	8-9/16	26-1/4	24-1/2	8-5/16	31

WIRE RANGE	LINE LUGS	LOAD LUGS	NEUTRAL BAR
A & B	250 MCM - #6 CU-AL (1-HOLE LUG)	250 MCM - #6 CU-AL (4-HOLE LUG)	350 MCM - #6 CU-AL (4-HOLE BAR)
C & D	(2) 250 MCM - 1/0 OR (1) 600 MCM - #4 CU-AL (1-HOLE LUG)	250 MCM - #6 CU-AL (4-HOLE LUG)	350 MCM - #6 CU-AL (6-HOLE BAR)
J	1/0 - #14 CU-AL (1-HOLE LUG)	1/0 - #14 CU-AL (1-HOLE LUG)	1/0 - #14 CU-AL (3-HOLE LUG)

Other load lug and neutral configurations available. Contact RONK for more information

Sales Information: 1-800-221-7665

RONK
ELECTRICAL INDUSTRIES, INC.

Service & Support: 1-217-563-8333

106 E. State Street • Nokomis, Illinois 62075 www.ronkelectrical.com Phone: 217-563-8333 • Fax: 217-563-8336